


Data sheet - BSO-3,5M3-8

Blind self-clinching standoffs

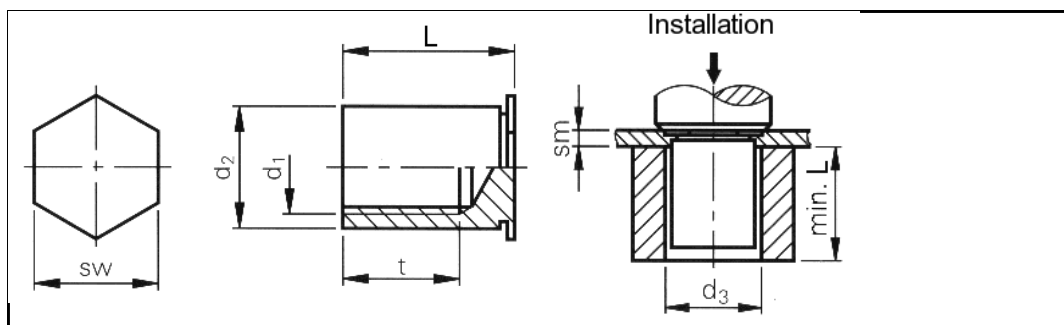

| | |
|--|---|
| 3D-Data available | |
| Order description | BSO-3,5M3-8 |
| Thread d1 | M3 |
| Hole-Ø in the sheet +0.08 0 | 5.4 mm |
| d2 0 -0.13 | 5.39 mm |
| d3 | 5.6 mm |
| sw | 6.4 mm |
| Min. sm | 1.0 mm |
| L +0.05 -0.13 | 8 mm |
| Depth of thread tmin. | 4 mm |
| Min. edge distance up to the hole centre | 6.8 mm |
| Material | Case-hardened zinc-plated carbon steel, bright-finished aluminium on request. |
| Use | For sheet hardnesses up to HRB 80. |
| Note | For sheet applications > HRB 80, type BSO4 should be used. |
| Tools | |
| Insertion machines | |

uniform resource locator: