


Data sheet - KF2-M2

PEM® Einpressmuttern für Kunststoffe

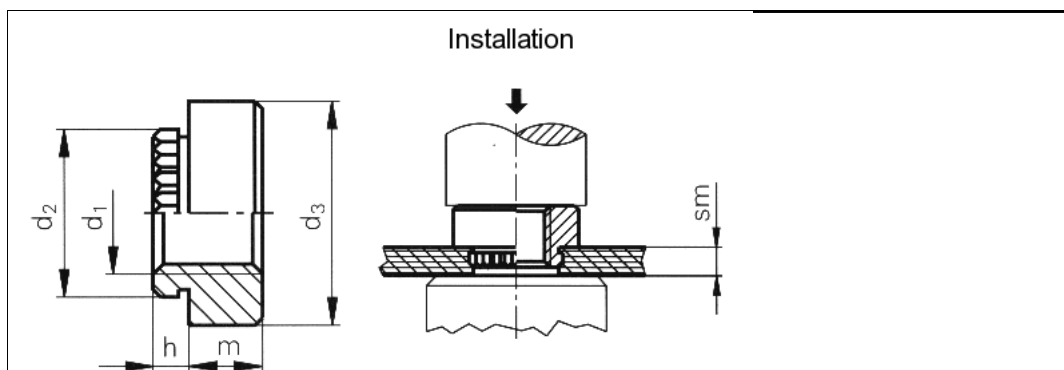

3D-Data available	
Order description	KF2-M2
Thread d1	M2
Hole-Ø in the plastic +0.08 0	3.70 mm
d2 ±0.08	4.19 mm
d3 ±0.13	5.56 mm
m ±0.13	1.5 mm
Max. h	1.53 mm
Min. sm	1.53 mm
Min. edge distance up to the hole centre	4.2 mm
Material	Tin-plated steel.
Use	For printed circuit boards, fibre glass, phenolic resin, nylon, epoxy, plexiglass etc. (also for aluminium casting and magnesium) up to HRB 60.
Note	Types KF2 and KFS2 are designed for unplated thru-hole applications. When used in plated thru-hole applications, a tolerance of +.005" - .001"/+0.13 mm - 0.03 mm should be used.
Tools	
Insertion machines	

uniform resource locator: