


Data sheet - SF-3-1,2

PEM® SpotFast® Einpressverbinder

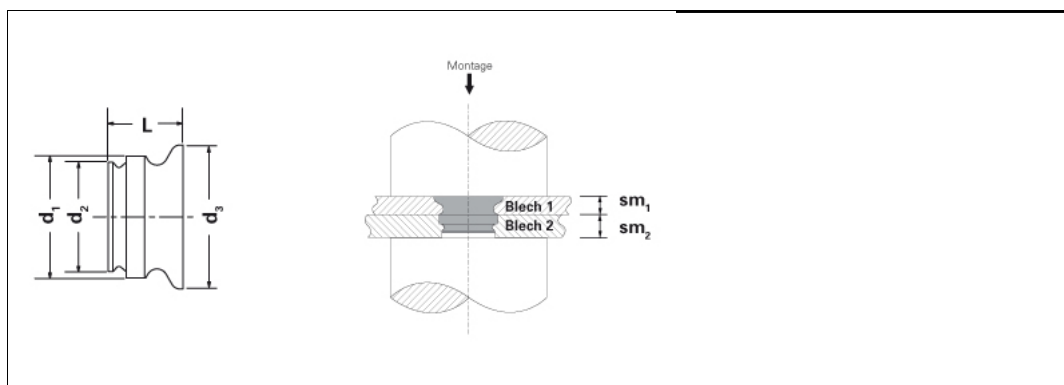

3D-Data available	
Application	Flush joining of two sheets of metal.
Order description	SF-3-1,2
Sheet 1 $sm_1 \pm 0.08$	1.2 mm
Sheet 1 \varnothing -Hole $+0.08$	3.0 mm
Sheet 2 sm_2 min.	1.2 mm
Sheet 2 \varnothing -Hole $+0.08$	2.5 mm
Max. d_1	2.98 mm
Max. d_2	2.48 mm
Max. d_3	3.76 mm
Max. L	2.31 mm
Min. edge distance up to the hole centre	2,54 mm
Material	Zinc-plated carbon steel.
Use	For sheet hardnesses up to HRB 80.
Tools	
Insertion machines	

uniform resource locator: