


## Data sheet - TA-10-075

### PEM® TackPin™ Einpressverbinder

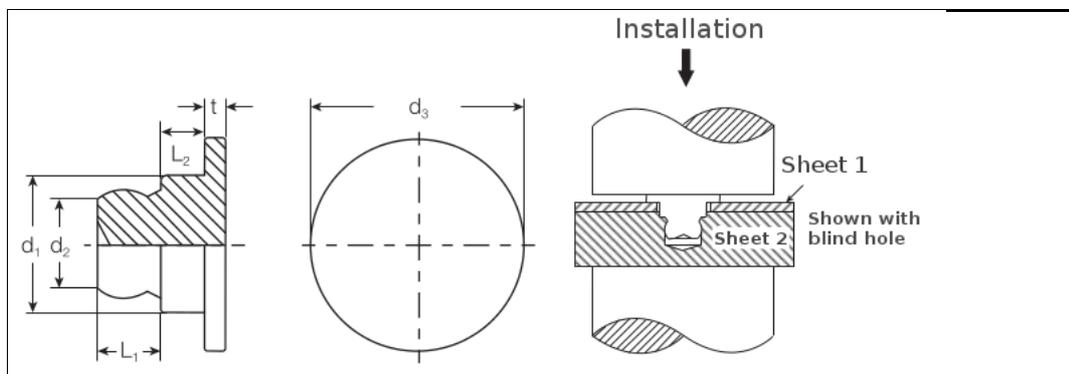

|  |   |
|--|---|
| 3D-Data available                        |   |
| Application                              | Flush joining of two sheets of metal.                                   |
| Order description                        | TA-10-075   |
| Sheet 1 sm1                              | 0.71 - 0.79 mm  |
| Sheet 1 Ø-Hole ± 0,05                    | 1.47 mm   |
| Sheet 2 sm2 min.                         | 0.89 mm   |
| Sheet 2 Ø-Hole -0.05                     | 1.02 mm   |
| L1 ± 0.075                               | 0.610 mm  |
| L2 ± 0.075                               | 0.914 mm  |
| d1 ± 0.05                                | 1.30 mm   |
| Max. d2                                  | 0.89 mm   |
| d3 ± 0.1                                 | 2.00 mm   |
| t ± 0.1                                  | 0.20 mm   |
| Min. edge distance up to the hole centre | 1.00 mm   |
| Material                                 | Aluminum  |
| Use                                      | For sheet hardnesses up to HRB 45.                                      |
| Information                              | Min. sheet thickness 0.89 mm for blind holes and 0.5 mm for thru holes. |
| Tools                                    |   |
| Insertion machines                       |   |

uniform resource locator: